

09-25-00

A

JC893 U.S. PTO  
09/23/00

## PATENT APPLICATION

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

## UTILITY PATENT APPLICATION TRANSMITTAL LETTER

Atty./Agent Docket No.: CM013181

Mailing Date: 9/22/00

Express Mail Label No.: EJ230847427US

Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Dear Sir:

Transmitted herewith for filing under 37 CFR 1.53 (b) is a Non-provisional Utility Patent Application:

☒ New Application; or \_\_\_\_\_ Continuation; or \_\_\_\_\_ Divisional, or \_\_\_\_\_  
Continuation-in-Part (CIP) Application of prior US application No. \_\_\_\_\_, filed on \_\_\_\_\_, having  
US Examiner \_\_\_\_\_, in Group Art Unit \_\_\_\_\_ of \_\_\_\_\_

Inventor(s): ZILI LI; JON SCHINDLER; ROBERT AKINS and GEORGE VALLIATH

For (Title): CHOLESTRIC LIQUID CRYSTAL DEVICE HAVING VARIABLE  
REFLECTED WAVELENGTH

This transmittal letter has 2 total pages.

Enclosed are:

- ☒ 2 sheets of drawings, along with 19 pages of specification, claims, and abstract.
- ☒ Oath or Declaration Combined with Power of Attorney (   pages) (UNSIGNED)
- \_\_\_\_\_ Newly Executed (original or copy)
- \_\_\_\_\_ Copy from a prior application (if this is a Continuation/Division with no new matter)
- \_\_\_\_\_ Statement deleting named inventor(s) in prior application if this is a
- \_\_\_\_\_ Continuation/Division (See 37 CFR 1.63(d)(2) and 1.33(b).)
- \_\_\_\_\_ Consider as the above Statement, Please delete as inventors for this application
- \_\_\_\_\_ the following inventors named in the prior application: \_\_\_\_\_
- \_\_\_\_\_ Foreign priority to \_\_\_\_\_ Patent application having serial number \_\_\_\_\_, and a  
filing date of \_\_\_\_\_ is hereby claimed under 35 USC 119.
- \_\_\_\_\_ A copy of the priority document is included herewith.
- \_\_\_\_\_ An Assignment Transmittal Letter and Assignment of the invention to MOTOROLA, INC.  
(UNSIGNED)
- \_\_\_\_\_ An Information Disclosure Statement (IDS), with \_\_\_\_\_ PTO-1449, and \_\_\_\_\_ citation copies.
- \_\_\_\_\_ Petition For Extension of Time for parent application of the present Continuation/Division/CIP  
application
- ☒ Print EFS Inventor Information Sheet(s).
- ☒ Return Receipt Postcard
- \_\_\_\_\_ Preliminary Amendment
- \_\_\_\_\_ Please cancel filed claims \_\_\_\_\_.
- \_\_\_\_\_ Incorporation by Reference (for Continuation/Division application) The entire disclosure of the  
prior application, from which a copy of the oath or declaration is supplied, is considered as being

JC893 U.S. PTO  
09/23/00  
09/23/00

part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

Since the present application is based on a prior US application, please amend the specification by adding the following sentence before the first sentence of the specification: "The present application is based on prior US application No. \_\_\_\_\_, filed on \_\_\_\_\_, which is hereby incorporated by reference, and priority thereto for common subject matter is hereby claimed."

☒ The filing fee is calculated as follows:

CLAIMS AS FILED, LESS ANY CANCELED BY AMENDMENT

	NUMBER OF CLAIMS	NUMBER EXTRA	RATE	FEE
TOTAL CLAIMS	17 - 20 =	0	X \$18	= 0
INDEPENDENT CLAIMS	5 - 3 =	2	X \$78	=156.00
MULTIPLE DEPENDENT CLAIMS			\$260	= \$ 0.00
			BASIC FEE	=\$ 690.00
			TOTAL FILING FEE	= 846.00


☒ Please charge Deposit Account No. 13-4772 in the amount of \$ 846.00 for the Total Filing Fee.

☒ The Commissioner is hereby authorized to charge any additional fees which may be required now or in the future under 37 CFR 1.16 or 37 CFR 1.17, including any present or future time extension fees which may be required, or credit any overpayment to Deposit Account No. 13-4772

☒ One additional copy of this sheet is enclosed

Please forward all correspondence to:

Customer Number **22917**

By:   
Douglas D. Fekete  
for Applicant(s)  
Registration No. 29,065  
MOTOROLA, INC.  
Phone: (847) 538-2447  
Fax: (847) 576-3750

# INVENTOR INFORMATION

Inventor One Given Name:: ZILI  
Family Name:: LI  
Postal Address Line One:: 5045 BRADWICK COURT  
City:: BARRINGTON  
State or Province:: IL  
Country:: USA  
Postal or Zip Code:: 60010  
City of Residence:: BARRINGTON  
State or Province of Residence:: IL  
Country of Residence:: USA  
Citizenship Country:: CHINA  
Inventor Two Given Name:: JON  
Family Name:: SCHINDLER  
Postal Address Line One:: 7649 N. EASTLAKE TERRACE #3D  
City:: CHICAGO  
State or Province:: IL  
Country:: USA  
Postal or Zip Code:: 60626  
City of Residence:: CHICAGO  
State or Province of Residence:: IL  
Country of Residence:: USA  
Citizenship Country:: USA  
Inventor Three Given Name:: ROBERT  
Family Name:: AKINS  
Postal Address Line One:: 1106 NIGHTINGALE  
City:: PALATINE  
State or Province:: IL  
Country:: USA  
Postal or Zip Code:: 60067  
City of Residence:: PALATINE  
State or Province of Residence:: IL  
Country of Residence:: USA  
Citizenship Country:: USA  
Inventor Four Given Name:: GEORGE  
Family Name:: VALLIATH  
Postal Address Line One:: 29 E. FABISH DRIVE  
City:: BUFFALO GROVE  
State or Province:: IL  
Country:: USA  
Postal or Zip Code:: 60089  
City of Residence:: BUFFALO GROVE  
State or Province of Residence:: IL  
Country of Residence:: USA  
Citizenship Country:: 60089

## CORRESPONDENCE INFORMATION

# 2019

# 2019

# 2019

## LIQUID CRYSTAL DEVICE HAVING VARIABLE REFLECTED WAVELENGTH

This invention relates to cholesteric liquid crystal devices. More particularly, the invention relates to such device comprising a cholesteric liquid crystal material having a reflective state, in which the wavelength of the reflected light is altered by an applied electric field, and to the method of operating the device to alter the wavelength of the reflected light.

### BACKGROUND OF THE INVENTION

A typical cholesteric liquid crystal display device comprises a layer of cholesteric liquid crystal material disposed between a front transparent plate and a back plate. Electrodes formed of a transparent, conductive film are applied to the inner surfaces of the plates. In response to an electric field applied between the electrodes perpendicular to the front plate,  $V_{\perp}$ , the cholesteric liquid crystal material switches between a transparent state and a reflective state. In the reflective state, the cholesteric material intercepts light through the front plate and reflects the light back through the front plate. A typical display comprises a plurality of pixels, each corresponding to a distinct region of cholesteric liquid crystal layer having electrodes that switch the region independent of other regions. In the reflective state, the region forms a bright pixel that cooperates with light from surrounding pixels to create an image for the display.

A preferred type of cholesteric liquid crystal material is composed of chiral dopants and a nematic host. The nematic molecules are elongated along a longitudinal molecular axis. In the presence of the chiral dopant, the molecules form a helical arrangement in the reflective state, with the molecular axes perpendicular to the helical axis and the helical axis perpendicular to the front plate. The helical arrangement is characterized by a pitch which is directly related to the wavelength,  $\lambda$ , of the reflected light. In contrast, when the molecules are not aligned,

referred to as a scattered state, the material becomes transparent. Application of an electric field along the helical axis is effective to switch the cholesteric liquid crystals between the transparent state and the reflective state by scattering the molecules or causing them to align.

- 5 Once switched, the cholesteric material remains in the state even after the electrical field is removed, until an appropriate field is applied to cause the material to switch again.

The wavelength of reflected light is determined by the pitch of the cholesteric molecules in the helical arrangement. This, in turn, is  
10 determined by the proportion of the chiral dopant to nematic molecules. Different levels of chiral dopants result in different pitch lengths. For common materials, small amounts of dopant result in reflected light having longer wavelengths, corresponding to red color, whereas higher concentrations of dopant are effective to reflect light having shorter  
15 wavelengths, shifted towards green or blue color.

Thus, one drawback of conventional cholesteric displays is that the material, once formulated, is limited to reflecting light of a predetermined wavelength, that is, a single color. In order to get a multicolored display, more than one cholesteric liquid crystal material is  
20 required. For example, layers of red, green and blue cholesteric liquid crystal materials may be stacked and then selectively switched between reflective and transparent states to form different colors. However, such stacks tend to be thick, heavy, and expensive to manufacture. They also generally require separate drivers to control the switching of each color  
25 layer.

Accordingly, there has been a long felt need for a cholesteric liquid crystal device that utilizes a single layer of liquid crystal material to form a multicolor display and that may readily be manufactured as a thin, relatively inexpensive device.

30

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a cross-sectional view of a region of a cholesteric liquid crystal display device in accordance with the invention.

FIG. 2 is a plot of peak wavelength in nanometers of reflected light of a cholesteric liquid crystal material as a function of applied voltage,  $V_p$ , applied in accordance with this invention.

FIG. 3 is a 1931 CIE Chromaticity Diagram showing color of reflected light for cholesteric liquid crystal material subjected to an applied voltage,  $V_p$ , in accordance with this invention.

FIG. 4 is a sectional view of a pixel of a cholesteric liquid crystal display device comprising adjacent subpixels, in accordance with another aspect of this invention.

## DESCRIPTION OF THE INVENTION

In accordance with the present invention, a cholesteric liquid crystal device comprises a cholesteric liquid crystal material having a reflective state wherein the cholesteric material reflects light characterized by a first wavelength in the absence of an applied electric field and means for applying an electric field to cause the cholesteric liquid crystal material to reflect light characterized by a second wavelength distinct from the first wavelength. In a preferred embodiment, this invention provides a display device comprising a plurality of pixels that cooperate to create a display viewable by an observer. At each pixel, the cholesteric liquid crystal material is switchable, in response to an electric field in a first direction, between a transparent state and a reflective state. In the absence of an electric field applied in accordance with this invention, the cholesteric liquid crystal material in the reflective state reflects light characterized by a first wavelength, which corresponds to a first color for the display. In accordance with this invention, an electric field is applied to the cholesteric liquid crystal material in the reflective state in a second





Also significantly, the reflectivity and color of the material at region 5 may be altered independently from the surrounding material, thereby permitting the light from each pixel to be selected as needed for the desired display image.

5        Display device 2 comprises a front transparent plate 6 and a back plate 8 about layer 4. Plate 6 is suitably formed of transparent material, such as glass or transparent polymeric material, for admitting light to the device, which light is reflected or absorbed to create the desired condition of the pixel. Back plate 8 is typically similar to front plate 6, but  
10    may be suitably formed of any material to provide, in combination with the front plate, desired strength and rigidity for the device. In this embodiment, back layer 8 is transparent and has an outer, opaque layer 10, which absorbs light transmitted through device 2. In this manner, when the cholesteric liquid crystal material is in the transparent state,  
15    light entering the device through front plate 6 is transmitted through region 5 and absorbed by coating to create a dark or black pixel for the display. Layer 10 is preferably applied on outer surface 12 of back layer 8 as a coating or an adhesively bonded film. Alternatively, back plate 8 could itself be opaque to absorb light transmitted through device 2  
20    without need for additional layer 10.

      The cholesteric liquid crystal material is switchable between a transparent state and a reflective state in response to an electric field  $E_t$  applied in first direction 22 generally perpendicular to the front plate and parallel to the viewing direction 3. For this purpose, device 2 comprises  
25    a pair of first electrodes 14 and 16 disposed on interior surfaces 18 and 20 of front plate 6 and back plate 8, respectively. Electrodes 14 and 16 are preferably formed of films of an electrically conductive, transparent material such as indium tin oxide, antimony tin oxide, or other such material which is applied at a thickness sufficient to promote conduction  
30    while thin enough to maintain transparency. The film is coated onto the surface and patterned to define the desired electrodes. Thereafter, transparent polymeric coatings 15 and 17 are applied over electrodes 14 and 16 and have rubbed inner surfaces 16 and 18 for orienting the

cholesteric liquid crystal molecules in the reflective state in a planar alignment effective to reflect light through the front plate, as is known in the art. While in the embodiment shown in FIG. 1 the film on front plate surface 18 is patterned to define a discrete electrode 14, alternately electrode 14 may be formed of an unpatterned layer covering surface 18 including adjacent pixels, in which case the layer cooperates with patterned electrode 18 in applying a field limited for switching region 5. Electrodes 14 and 16 are adapted to be connected to an external electrical power source (not shown) to establish an electrical voltage potential therebetween and thereby form an electrical field at region 5 sufficient to switch the cholesteric material between the transparent and reflective states.

Layer 4 of cholesteric liquid crystal material is disposed in the gap between front plate 6 and back plate 8. Cholesteric liquid crystal material is preferably of the type having positive dielectric anisotropic properties. Suitable liquid crystal materials are well known in the art and generally are composed of a mixture of host substance consisting of nematic liquid crystal molecules and a dopant consisting of chiral molecules. The proportion of the chiral to host constituents determines the natural helical pitch and reflective wavelength,  $\lambda$ , of the cholesteric material. In general, for common materials, a low concentration of dopant is utilized to achieve longer, red wavelengths, with progressively greater additions made to achieve shorter, green to blue wavelengths. In this embodiment in which the cholesteric liquid crystal material in the reflective state reflects light in the visible spectrum for forming a multi-color display, it is preferred to select a liquid crystal material that, in the reflective state and in the absence of an electric field applied in accordance with this invention, reflects light at a first wavelength corresponding to a blue color.

In accordance with a preferred embodiment of this invention, device 2 further comprises a pair of second electrodes 24 and 26 disposed about region 5 for applying an electric field  $E_p$  across the region in the direction 25 generally perpendicular to the switching field  $E_t$

22. For this purpose electrodes 24 and 26 are suitably disposed on back plate 8 about electrode 16 and covered by polymeric coating 15 and 17. A variable voltage AC power supply 28 and switch 30 are provided to apply an AC voltage between electrodes 24 and 26 to create the applied electric field,  $E_p$ . While this embodiment shows electrodes 24 and 26 both located on back plate 8, any location of electrodes in close proximity to the cholesteric liquid crystal material generates an  $E_p$  sufficient to drive the cholesteric liquid crystal pitch change is acceptable. Accordingly, in an alternate embodiment, the second electrodes may be disposed on front plate 6, or one on the front plate and one on the back plate.

During operation, cholesteric liquid crystal material at region 5 is activated to create a dark or colored pixel for a display viewed in direction 3. When cholesteric material is in a transparent state, ambient light entering the display through front plate 6 is transmitted through region 5 and absorbed by layer 10, thereby creating a dark or black pixel. To create a color pixel, an electrical potential is applied to first electrodes 14 and 16 to establish a switching electric field  $E_t$  in a first direction 22 sufficient to cause the material to switch to the reflective state. It is pointed out that the reflective state is maintained even after the applied electric field is discontinued until such time as a an electric field is applied to switch the material back to the transparent state. In the reflective state, the material at region 5 intercepts ambient light admitted to the device through front plate 6 and reflects light of selected wavelength back through the front plate. In the absence of any applied field such as between electrodes 24 and 26, the reflected light is characterized by a first wavelength, which depends upon the nature and composition of the liquid crystal material. In accordance with this invention, with the material in the reflective state, a second electrical potential is applied between electrodes 24 and 26 to create a field  $E_p$  in the second direction 25 distinct from the first direction 22 and to cause the liquid crystal material at region 5 to reflect light characterized by a second wavelength different from the first wavelength. In this manner,

the wavelength of the reflected light can be altered to achieve a desired color for the pixel.

While the invention is not limited to the following theory, it is believed that cholesteric liquid crystal material comprises nematic liquid crystal molecules that are elongated along a molecular axis. In the transparent state, the molecules are randomly scattered. However, when switched to a reflective state, the molecules align in a helical arrangement along a helical axis, with the molecular axis disposed in a first direction parallel to the front plate and the helical axis disposed in a second direction perpendicular to the first direction and the front plate. The desired axis orientation is accomplished by the interaction of the rubbed surfaces with adjacent molecules and results in light reflected along direction 3 for viewing. The wavelength of the reflected light is related to the pitch of the helical arrangement, which, in the absence of an applied field, is determined by the composition of the liquid crystal material. In accordance with this invention, application of a suitable electric potential between electrodes 24 and 26 produces an electric field generally parallel to direction 25 and perpendicular to the helical arrangement. Interaction between the applied field and the cholesteric liquid crystal molecules alters the pitch of the helical arrangement. This increased pitch changes the reflected wavelength to generate a color shift from the initial color to any desired color of longer wavelength. It is found that the difference between the first, original wavelength and the second wavelength is dependent upon the voltage differential between the electrodes and increases as a function of the field. Moreover, a field  $E_t$  applied in direction 22 can be applied in conjunction with  $E_p$  in direction 25 for grayscale control by switching between transparent and reflective states.

Colors within a wide range can be achieved for a display 2 by beginning with a cholesteric liquid crystal 4 having a wavelength in the visible blue or ultraviolet region and increasing the voltage across electrodes 24 and 26 to drive the crystal through all colors toward the red wavelengths. While two electrodes have been shown in FIG. 1,

multiple electrodes may be used. It is preferred to locate electrodes 24 and 26 as closely together as practical to reduce the voltage required to drive the color change. In general, it is preferred to minimize the applied voltage while achieving the desired color for the pixel. It is found that, for electrodes spaced apart by a distance of about 50 microns, suitable color changes may be affected by applying voltages between about 5 to 500 volts. Other voltages may also be effective depending on the chemical composition of the cholesteric liquid crystals and the spacing of the electrodes. Color shifts are suitably obtained by applying DC or AC voltages, it is preferred to apply alternating current voltage to avoid accumulation of impurities in the liquid crystal material that would otherwise tend to occur adjacent to the electrodes.

With reference to FIG. 2, a plot of peak wavelength in nanometers of a reflective cholesteric liquid crystal display as a function of applied field  $E_p$  is shown for a display device containing a blue liquid crystal cholesteric material available under the designation BL061 from Merck Chemical Co. Front and bottom plates were made of glass and included an interior coating of a clear polyimide resin. The electrodes were composed of indium tin oxide, formed by coating the plate surfaces and patterning. Electrodes 24 and 26 were approximately 10 microns wide and spaced approximately 50 microns apart. The cholesteric liquid crystal layer was approximately 5 microns thick. A square wave AC voltage of various amplitudes was applied at 1 kHz to generate the in-plane electric field. FIG. 2 shows the wavelength of the reflected light as a function of the applied voltage between the electrodes. As indicated at region 34, in the absence of an applied field, the reflected light had wavelengths in the blue spectrum, creating a blue color when observed. As indicated by 36, application of a voltage between about 240 and 260 volts alters the wavelength to reflect light in the green spectrum. Application of higher voltages above about 280 volts shifts the color into the red spectrum, indicated at 38.

FIG. 3 shows the results of FIG. 2 plotted on a 1931 x,y Chromaticity Diagram with blue, green and red regions indicated at 35, 37 and 39, respectively.

It can be seen that in the above described cell the initially blue  
5 cholesteric liquid crystal was driven to green at an applied voltage of approximately 240 to 260 V and red at approximately 280 to 300 V. We have found that decreasing the distance between the electrodes reduces the voltage required to affect a desired color change. Also, multiple electrodes may be employed to apply an effective field over greater  
10 distances and thereby facilitate uniform color in pixels of larger dimensions.

In accordance with alternate aspect of this invention, a display having an enhanced color range is provided by a liquid crystal display device 40 in FIG. 4. Device 40 comprises a pixel 42 that includes  
15 subpixels 44 and 46, of which at least on subpixel 44 includes means for applying an electric field to vary the reflected color in accordance with the present invention. Subpixels 42 and 44 are positioned in close proximity such that light reflected by each is perceived by a viewer as a single pixel in the display.

Referring to FIG. 4, device 40 is formed similar to device 2 in FIG. 1 and comprises a layer 60 of cholesteric liquid crystal material interposed between front and back plates 62 and 64 bearing inner polymeric coatings 66 and 68. An opaque coating 63 is applied to plate 64. At subpixel 42 a pair of first electrodes 70 and 71 are disposed for  
20 applying an electric field in a first direction 74 for switching the cholesteric material between a transparent and a reflective state. Also at subpixel 44, a pair of second electrodes 72 and 73 is disposed connected to a variable AC voltage supply 58 for generating an electric field in a second direction 76 effective to alter the color of the light  
25 reflected by the cholesteric material in the reflective state. At subpixel 46, a pair of electrodes 78 and 80, similar to electrodes 70 and 72, is disposed for producing an electric field parallel to direction 74 for  
30

switching of the adjacent cholesteric material between the transparent and reflective states.

During operation, subpixels 44 and 46 may be independently switched between reflective and transparent states by application of an electric potential to electrodes 70 and 72 and electrodes 78 and 80, respectively. With both subpixels in the transparent state, ambient light entering the device through front plate 62 is transmitted through layer 60 and absorbed by opaque layer 63, thereby creating a dark pixel. To create a color pixel, an electrical potential is applied to electrodes 71 and 72 to switch the adjacent cholesteric material at subpixel 44 to a reflective state. Similarly, an electric voltage may be applied to electrodes 78 and 80 to switch subpixel 46 to the reflective state. The preferred cholesteric material reflects light at a wavelength corresponding to a blue color in the absence of an applied field in direction 76. Thus, switching one or both of subpixels 44 or 46 provides a blue color for pixel 42. To alter the color an electrical potential is applied to electrodes 72 and 73 in a manner similar to electrodes 24 and 26 in FIG. 1. The reflected light with the selected color then combines with reflected blue light from subpixel 46 to achieve a desired overall color for the pixel.

It is known to obtain a wide range of colors by combination of red, green and blue primary colors. Thus, by selectively adjusting the color of subpixel 44 and selectively combining the light therefrom with reflected light from subpixel 46, a full range of colors may be achieved.

By way of example, a cholesteric material is selected that reflects light in the blue region 35 of the Chromaticity Diagram of FIG. 3. The voltage of supply 58 may be adjusted to alter the cholesteric material to reflect green light for subpixel 44, that is, light in region 37. Subpixel 46 may be in the darkened state to create a green pixel or may be in a reflective state, whereupon the color of the pixel results from the combination of the blue and green colors from the subpixels. A higher voltage may be applied to electrodes 72 and 73 to drive the color of subpixel 44 toward the red range 39. With subpixel 46 darkened, a red pixel is then

obtained for the display. Alternately, with subpixel 46 in the reflective state, a color from the combination of blue and red is obtained for the pixel. The color resulting from the combination with the reflected blue light depends upon the precise wavelength of the reflected light from subpixel 44, which in turn is dependent upon the voltage applied thereto. Thus, by adjusting the voltage to subpixel 44, any color within a full range may be selected for the pixel.

In the described embodiments, the device is employed that reflects light within the visible spectrum for producing a display that is viewable by a person. This invention may also be employed in other types of cholesteric liquid crystal devices. Thus, this invention may be employed in an optical switch comprising a cholesteric liquid crystal material to apply an electric field to adjust the wavelength of the light transmitted or reflected by the switch. For this purpose, cholesteric materials may be utilized having compositions effective to reflect light outside the visible spectrum, that is ultraviolet or infrared light.

While our invention has been described in terms of specific embodiments, clearly other forms could be readily adapted by one skilled in the art. Accordingly, the scope of the invention is to be limited only in accordance with the following claims.

# **WHAT IS CLAIMED:**



1. A liquid crystal device comprising  
a transparent front plate;  
a back plate spaced apart from the transparent front plate;  
a cholesteric liquid crystal material between said transparent front  
5 plate and said back plate, said cholesteric liquid crystal material having a  
reflective state wherein said cholesteric liquid crystal material reflects  
light through said front plate, said light characterized by a first  
wavelength in the absence of an applied electric field; and  
means for applying an electric field to said cholesteric liquid  
10 crystal material in the reflective state to cause said cholesteric liquid  
crystal material to reflect light characterized by a second wavelength  
different than said first wavelength.

2. The cholesteric liquid crystal device of claim 1 wherein the  
15 cholesteric liquid crystal material in said reflective state comprises  
molecules in a helical arrangement having a helical axis in a first  
direction, and said means is adapted to apply an electric field in a  
second direction nonparallel to the first direction.

20           3. The cholesteric liquid crystal device of claim 2 wherein the cholesteric liquid crystal material in said reflective state is characterized by a first pitch in the absence of an applied electric field and wherein said means is adapted to apply an electric field effective to produce a second pitch different from the first pitch.



8. A liquid crystal display comprising  
a transparent front plate;  
a back plate spaced apart from said front plate;  
a cholesteric liquid crystal layer between said transparent front  
5 plate and said back plate and having a region, said cholesteric liquid  
crystal material comprising a cholesteric liquid crystal material  
switchable between a transparent state and a reflective state wherein  
said liquid crystal material reflects light having a first wavelength through  
said front plate;  
10 first electrodes adjacent said cholesteric liquid crystal material  
layer at said region for applying a first electric field to switch said  
cholesteric liquid crystal material between the transparent state and the  
reflective state; and  
second electrodes located adjacent said cholesteric liquid crystal  
15 material about said region for applying a second electric field across said  
region to cause said liquid crystal material at said region to reflect light at  
a second wavelength different than said first wavelength.

9. The cholesteric liquid crystal display of claim 8 wherein said  
20 first pair of electrodes apply the first electric field along a first direction  
perpendicular to the transparent front plate, and  
wherein the second pair of electrodes applies the second electric  
field along a second direction perpendicular to the first direction

25 10. The cholesteric liquid crystal display device of claim 8  
wherein the cholesteric liquid crystal material reflects blue light in the  
reflective state in the absence of a second applied electric field.

30 11. The cholesteric liquid crystal display of claim 8 wherein the  
second electric field is obtained by applying a voltage across the second  
electrodes between about 5 to 500 volts.

12. A cholesteric liquid crystal display device comprising a transparent front plate,

a back plate spaced apart from the transparent front plate,

5 a layer between the transparent front plate and the back plate and comprising a plurality of pixels, each said pixel comprising a first subpixel and a second subpixel adjacent the first subpixel, said layer composed of a cholesteric liquid crystal material switchable between a transparent state and reflective state, wherein said cholesteric liquid  
10 crystal material in said reflective state reflects light at a first wavelength in the absence of an applied electric field,

first electrodes at said first subpixel for applying a first electric field in a first direction to switch said cholesteric liquid crystal material at said first subpixel between the transparent state and the reflective state,

15 means for applying a second electrical field at the first subpixel in a second direction different from the first direction to cause said cholesteric liquid crystal material at said first subpixel to reflect light at a second wavelength different from the first wavelength, and

electrodes at said second subpixel for applying an electric field to switch said cholesteric liquid crystal material between said transparent state and said reflective state, such that said electrodes at said second subpixel switch said cholesteric liquid crystal at said second subpixel independent from the first subpixel.

13. The cholesteric liquid crystal displaying device of claim 12 wherein said means for applying a second electric field at the first subpixel comprises a pair of electrodes distinct from the electrodes for applying the first electric field.

5

14. The cholesteric liquid crystal display device of claim 12 wherein said second subpixel reflects light of a first color and wherein said first subpixel reflects light of a second color distinct from the first  
10 color, and wherein the light from the first subpixel and the second subpixel combine such that light from the pixel is perceived to be a third color.

15. A method for operating a cholesteric liquid crystal device comprising a cholesteric liquid crystal material, said method comprising  
applying a first electric field in a first direction to the cholesteric liquid crystal material to switch the cholesteric liquid crystal material  
5 between a transparent state and a reflective state, wherein the cholesteric liquid crystal material in said reflective state reflects light characterized by a first wavelength in the absence of an applied electric field, and

applying a second electric field in a second direction to the  
10 cholesteric liquid crystal material in the reflective state to cause said cholesteric liquid crystal material to reflect light characterized by a second wavelength distinct from the first wavelength.

16. The method of claim 15 wherein the second electric field is  
15 obtained by applying a voltage across the second electrodes between about 5 to 500 volts.

17. The method of claim 15 wherein the first wavelength corresponds to a blue color and wherein the second wavelength is  
20 greater than the first wavelength to correspond to a color with the green or red ranges.

## ABSTRACT OF THE INVENTION

A liquid crystal device comprises a cholesteric liquid crystal material interposed between a transparent front plate and a back plate. The cholesteric liquid crystal material is switchable between a transparent state and a reflective state in response to an electric field applied in a first direction. In the reflective state the material reflects light characterized by a first wavelength when no electric field is applied. Electrodes are provided for applying an electric field to the cholesteric liquid crystal material in the reflective state in a second direction distinct from the first direction. In this manner the cholesteric liquid crystal material is altered to cause the material to reflect light characterized by a second wavelength different from the first wavelength. A display device may thus be produced having pixels capable of a wide range of colors, thereby achieving a multicolored image for the display.





FIG. 2


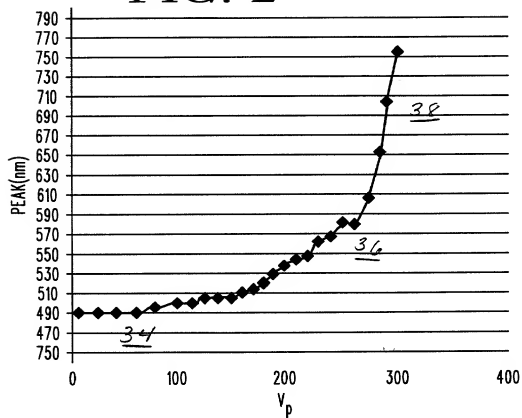


FIG. 3



PATENT APPLICATION DECLARATION  
COMBINED WITH POWER OF ATTORNEY

Attorney's Docket No.: CM01318I

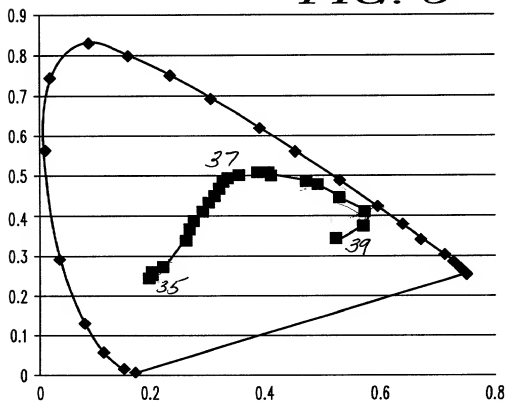

Regular (Utility)



Design Application

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**CHOLESTRIC LIQUID CRYSTAL DEVICE HAVING  
VARIABLE REFLECTED WAVELENGTH**

the specification of which:



is attached hereto



was filed on: \_\_\_\_\_

as U.S. Serial No.: \_\_\_\_\_

and was amended on \_\_\_\_\_

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with 37 CFR § 1.56(a).

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):



no such application(s) filed



such application(s) identified as  
follows:

Application Number	Country	Date of Filing (day, month, year)	Priority Claimed	
			<input type="checkbox"/> Yes	<input type="checkbox"/> No
			<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under 35 U.S.C. §119(e) of any United States provisional application(s) listed below:

Provisional Application Serial No.: \_\_\_\_\_

Provisional Application Filing Date: \_\_\_\_\_

I hereby claim the priority benefit under 35 USC §120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 USC 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Prior U.S. Application(s):



no such application(s) filed



such application(s) identified as follows:

U.S. Parent Application No. or PCT Parent No.	Filing Date (day, month, year)	Status (Patented, Pending, Abandoned)

AS A NAMED INVENTOR, I HEREBY APPOINT THE FOLLOWING REGISTERED ATTORNEY(S) OR AGENT(S) TO PROSECUTE THIS APPLICATION AND TO TRANSACT ALL BUSINESS IN THE PATENT AND TRADEMARK OFFICE CONNECTED THEREWITH:

**CUSTOMER NUMBER 22917**

Send correspondence to Customer Number **22917**

Address all telephone calls to:  
Douglas D. Fekete at (847) 538-2447  
Fax (847) 576-3750

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 USC and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of first-named or sole inventor <u>ZILI LI</u>		
Inventor's signature _____		Date _____
Residence	<u>BARRINGTON</u>	<u>IL</u>
	City	State or Foreign Country
Citizenship	<u>CHINA</u>	
	Country	
Post Office Address	<u>5045 BRADWICK COURT</u>	
	Street Address	
<u>BARRINGTON</u>	<u>IL</u>	<u>60010</u>
City	State or Country	Zip Code

Full name of second-named joint inventor <u>JON SCHINDLER</u>		
Inventor's signature _____		Date _____
Residence	<u>CHICAGO</u>	<u>IL</u>
	City	State or Foreign Country
Citizenship	<u>USA</u>	
	Country	
Post Office Address	<u>7649 N. EASTLAKE TERRACE #3D</u>	
	Street Address	
<u>CHICAGO</u>	<u>IL</u>	<u>60626</u>
City	State or Country	Zip Code

Full name of third-named joint inventor	<u>ROBERT AKINS</u>		
Inventor's signature	_____	Date	_____
Residence	<u>PALATINE</u>	<u>IL</u>	
	City	State or Foreign Country	
Citizenship	<u>USA</u>		
	Country		
Post Office Address	<u>1106 NIGHTINGALE</u>		
	Street Address		
<u>PALATINE</u>	<u>IL</u>	<u>60067</u>	
City	State or Country	Zip Code	

Full name of fourth-named joint inventor	<u>GEORGE VALLIATH</u>		
Inventor's signature	_____	Date	_____
Residence	<u>BUFFALO GROVE</u>	<u>IL</u>	
	City	State or Foreign Country	
Citizenship	<u>USA</u>		
	Country		
Post Office Address	<u>29 E. FABISH DRIVE</u>		
	Street Address		
	<u>BUFFALO GROVE</u>	<u>IL</u>	<u>60089</u>
	City	State or Country	Zip Code